

REFRIGERATION REFRIGERATORS


ROLL-IN and PASS-THROUGH
+2 ÷ +10°C
FOR TROLLEYS



REFRIGERATOR FOR
ROLL-IN TROLLEYS



PASS-THROUGH REFRIGERATOR
FOR TROLLEYS

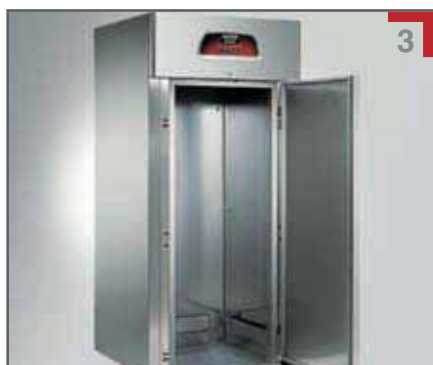

TARGET REFRIGERATOR FOR
ROLL-IN TROLLEYS









TARGET PASS-THROUGH
REFRIGERATOR FOR TROLLEYS

Refrigerators for Roll-in trolleys composed by 2 versions:
single door and 2 door-pass-through.



AISI 304 18-10 stainless steel panels and floor.

Interior suitable for trolleys - capacity 20 2x1/1 GN or
60x80 cm containers, or racks used in the ANGELO PO
banqueting system. Door clearance 730 x 1815 mm,
interior-working depth 880 mm. Enbloc refrigerating unit.

Automatic defrosting through hot gas. Automatic
evaporation of condense drain. Tropicalization: +43°C
max. **TE..**= Control panel with electronic circuit board **HACCP**
TD..= Control panel with digital thermometer – thermostat.

MOD.						
TDRI	105,5x105,5x225,5	+2/+10 °C	W 862	0,75	1	1
TDPT	105x113x225	+2/+10 °C	W 862	0,75	1	2
TERI	105,5x105,5x225,5	+2/+10 °C	W 862	0,75	1	3
TEPT	105x113x225	+2/+10 °C	W 862	0,75	1	4

ACCESSORIES

MOD.		Description	
ST02		KIT TEMPERATURE RECORDER WITH PRINTER 2 CHANNELS	1
CFP	59x68x172	TROLLEY FOR 18 X 2/1 GN CONTAINERS	



II-2007 129